
5.159 Regulated Crossing 137

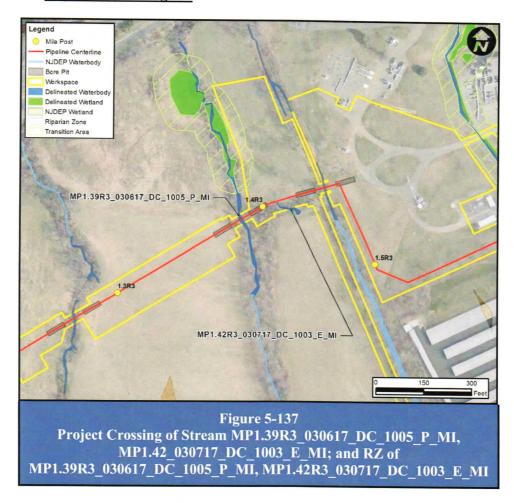

INVENTORY

Wetlands

Not present.

Transition Areas

Not present.

Special Aquatic Sites

Based upon fieldwork and review of publicly available data, special aquatic sites as defined at N.J.A.C. 7:7A-1.4 are not located at this regulated crossing.

Public Lands

None of the regulated resources in this crossing are on public lands.

Critical Habitat and Threatened or Endangered Species and their Habitat

Stream MP1.39R3_030617_DC_1005_P_MI has not been identified as potentially suitable habitat for any threatened or endangered species.

Stream MP1.42R3_030717_DC_1003_E_MI has not been identified as potentially suitable habitat for any threatened or endangered species.

Species accounts describing the natural history and habitat requirements; habitat assessment and/or targeted species survey results; study corridor documentation; potential habitat impacts; and recommended measures to avoid, minimize, and mitigate potential impacts to New Jersey Statelisted species potentially occurring within regulated areas of the study corridor are provided in the HPP.

State Open Waters and Channels

Stream MP1.39R3_030617_DC_1005_P_MI is a field-delineated minor, perennial north-flowing stream that traverses forested habitat. The banks are steeply cut and somewhat eroded. The bank width is approximately eight feet and the streambed substrate is made up of 50% gravel, with some cobble and lesser amounts of sand and boulders.

Stream MP1.42R3_030717_DC_1003_E_MI is a minor, ephemeral tributary of Alexauken Creek with eroded banks, which flows west through a wooded hedgerow bordered by agriculture fields. The feature appears to drain to the stream 030617_DC_1005_P_MI. The bank width is approximately four feet; the banks are noticeably eroded. The streambed substrate is mostly gravel, with some sand and silt.

Riparian Zones

RZ of MP1.39R3_030617_DC_1005_P_MI, MP1.42_030717_DC_1003_E_MI is the 300-foot riparian area associated with these streams. This riparian area is vegetated at these crossings.

Fishery Resources

According to the Surface Water Quality Standards N.J.A.C.7:9, Alexauken Creek is a classified as a trout maintenance waterbody (FW2-TM(C1)).

ASSESSMENT

Analysis Potential Temporary and Permanent Adverse Environmental Impacts of the Proposed Regulated Activity

Conventional bore is the pipeline construction method proposed at this regulated crossing. Adverse environmental impacts have been reduced or eliminated by the use of trenchless technology. As demonstrated in the Alternatives Analysis, Attachment K, to the extent that temporary construction access and workspace for the Project includes disturbance of vegetation, those impacts are unavoidable. Permanent impacts include the removal of trees and shrubs located within 15 feet of the pipeline that could compromise the integrity of the pipeline as required for compliance with FERC and Pipeline and Hazardous Materials Safety Administration requirements. In-place restoration is proposed to minimize environmental impacts at this crossing; mitigation, as required by NJDEP rules, is proposed to compensate for adverse wetland and riparian zone impacts. Based on the foregoing, it is not anticipated that the proposed conventional bore at this crossing will result in significant permanent adverse environmental impacts.

Measures Taken to Reduce Potential Adverse Environmental Impacts

Utilizing a conventional bore avoids in-stream impacts. However, impact to environmental features above the bore cannot be avoided as compliance with FERC requirements necessitates the

removal of trees and shrubs located within 15 feet of the pipeline that could compromise the integrity of the pipeline. In an effort to minimize or avoid adverse environmental impacts, PennEast will implement Project specific BMPs as detailed on the Project Soil Erosion and Sedimentation Control Plans (Attachment E-4). Section 4 of this report details the range of proposed BMPs and mitigation measures taken to reduce potential adverse environmental impacts. These BMPs comply with the Standards for Soil Erosion and Sediment Control in New Jersey.


- Delineation of all wetlands in the Project area;
- Avoidance, and minimization of impacts to wetlands to the greatest extent practicable as described in the Alternatives Analysis provided in Attachment K of the Multi-Permit Application;
- Mitigation of unavoidable impacts as described in the Mitigation Proposal provided Attachment N of the Multi-Permit Application;
- Minimization of the operational easement width in wetlands;
- Implementation of trenchless technology construction techniques;
- Follow the site-specific *Inadvertent Returns and Contingency Plan* to avoid and minimize potential impacts from inadvertent return;
- Collocation with existing ROW areas where possible and permitted to minimize forest losses;
- Minimization of forest and vegetation clearing to the greatest extent practicable;
- Allowed post-construction succession of temporarily cleared forest areas and restoration of forested wetlands to a function or value greater than or equal to existing conditions where practicable;
- Restoration of grassland areas to a function or value greater than or equal to existing conditions;
- Mitigation/compensation provided offsite to potentially result in net-neutral or improved regional habitat conditions for potentially affected species populations;
- Adherence to applicable timing restrictions;
- Potential incorporation of NJDEP-reviewed and approved wildlife enhancement design features on mitigation sites and restoration areas;
- Regular (daily) clearing of work areas by agency-approved and qualified environmental monitors. Safe and appropriate wildlife relocation as needed;
- Regular inspection of protective measures such as fences by environmental monitors;
- Post-construction maintenance standards following NJDEP Integrated Vegetation Management guidance set forth in the Strategies to Minimize Adverse Impacts to Wildlife from Management Activities on Powerline Rights-of-Way in NJ (NJDEP ENSP 2011) (Strategies);
- Incorporate FERC Invasive Species Management Plan;
- Development and utilization of equipment cleaning/sterilization, and other protocols to avoid the spread of invasive species in sensitive terrestrial, wetland and aquatic habitats;
- Project-specific (SESC) standards including temporary erosion control measures such as silt fence, turbidity barriers, sediment filter bags, and erosion mats;
- Commitment not to use herbicides during post-construction maintenance activities;
- Specific seasonal restrictions and buffers will be followed for species and species groups in accordance with *Strategies*;
- Project-specific protocols on appropriate fueling station locations and prohibited areas such as streams and wetlands and transition areas; project-specific cleanup protocols and notification for any unintended spills during construction;

- Vegetation within temporary workspace areas including wetlands and transition areas will be cut flush to the ground and matted where practicable: no grubbing is proposed in these areas:
- Regular inspection of construction equipment to ensure proper functioning with appropriate filters and air quality controls;
- Adherence to agency-approved blasting plan;
- Avoidance of work personnel outside of the workspace in adjacent naturalized areas (sensitive habitat areas will be posted); and
- Post-construction restoration of stream banks and beds and downstream water quality monitoring as required (sensitive habitat areas) before, during and after construction.

5.160 Regulated Crossing 138

Avoidance efforts eliminated Regulated Crossing 138.

5.161 Regulated Crossing 139

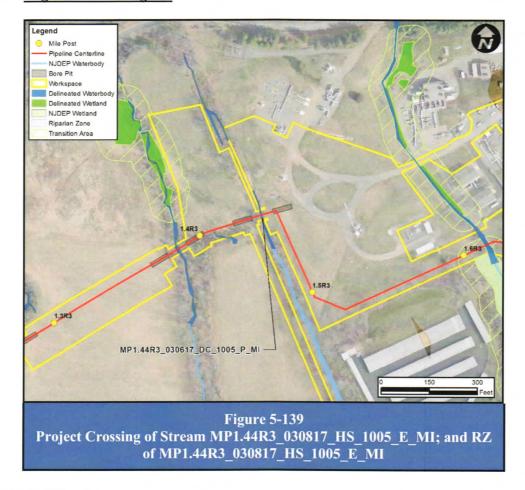

INVENTORY

Wetlands

Not present.

Transition Areas

Not present.

Special Aquatic Sites

Based upon fieldwork and review of publicly available data, special aquatic sites as defined at N.J.A.C. 7:7A-1.4 are not located at this regulated crossing.

Public Lands

None of the regulated resources in this crossing are on public lands.

Critical Habitat and Threatened or Endangered Species and their Habitat

Stream MP1.44R3_030817_HS_1005_E_MI has not been identified as potentially suitable habitat for any threatened or endangered species.

Species accounts describing the natural history and habitat requirements; habitat assessment and/or targeted species survey results; study corridor documentation; potential habitat impacts; and recommended measures to avoid, minimize, and mitigate potential impacts to New Jersey Statelisted species potentially occurring within regulated areas of the study corridor are provided in the HPP.

State Open Waters and Channels

Stream MP1.44R3_030817_HS_1005_E_MI is a field-delineated minor, possibly man-made ephemeral feature with no discernible flow, occurring along in a wooded hedgerow and passing beneath a dirt access road (via culvert). It continues southeast towards NJ-179. The bank width is approximately two feet. The streambed is made up of cobble and gravel, with some sand.

Riparian Zones

RZ of MP1.44R3_030817_HS_1005_E_MI is the 300-foot riparian area associated with an Alexauken Creek unnamed tributary.

Fishery Resources

According to the Surface Water Quality Standards N.J.A.C.7:9, Alexauken Creek is a classified as a trout maintenance waterbody (FW2-TM(C1)).

ASSESSMENT

Analysis Potential Temporary and Permanent Adverse Environmental Impacts of the Proposed Regulated Activity

Conventional bore is the pipeline construction method proposed at this regulated crossing. Adverse environmental impacts have been reduced or eliminated by the use of trenchless technology. As demonstrated in the Alternatives Analysis, Attachment K, to the extent that temporary construction access and workspace for the Project includes disturbance of vegetation, those impacts are unavoidable. Permanent impacts include the removal of trees and shrubs located within 15 feet of the pipeline that could compromise the integrity of the pipeline as required for compliance with FERC and Pipeline and Hazardous Materials Safety Administration requirements. In-place restoration is proposed to minimize environmental impacts at this crossing; mitigation, as required by NJDEP rules, is proposed to compensate for adverse wetland and riparian zone impacts. Based on the foregoing, it is not anticipated that the proposed conventional bore at this crossing will result in significant permanent adverse environmental impacts.

Measures Taken to Reduce Potential Adverse Environmental Impacts


Utilizing a conventional bore avoids in-stream impacts. However, impact to environmental features above the bore cannot be avoided as compliance with FERC requirements necessitates the removal of trees and shrubs located within 15 feet of the pipeline that could compromise the integrity of the pipeline. In an effort to minimize or avoid adverse environmental impacts, PennEast will implement Project specific BMPs as detailed on the Project Soil Erosion and Sedimentation Control Plans (Attachment E-4). Section 4 of this report details the range of proposed BMPs and mitigation measures taken to reduce potential adverse environmental impacts. These BMPs comply with the Standards for Soil Erosion and Sediment Control in New Jersey.

- Delineation of all wetlands in the Project area;
- Avoidance, and minimization of impacts to wetlands to the greatest extent practicable as described in the Alternatives Analysis provided in Attachment K of the Multi-Permit Application;
- Mitigation of unavoidable impacts as described in the Mitigation Proposal provided Attachment N of the Multi-Permit Application;
- Minimization of the operational easement width in wetlands;
- Implementation of trenchless technology construction techniques;
- Follow the site-specific *Inadvertent Returns and Contingency Plan* to avoid and minimize potential impacts from inadvertent return;
- Collocation with existing ROW areas where possible and permitted to minimize forest losses:
- Minimization of forest and vegetation clearing to the greatest extent practicable;
- Allowed post-construction succession of temporarily cleared forest areas and restoration
 of forested wetlands to a function or value greater than or equal to existing conditions
 where practicable;
- Restoration of grassland areas to a function or value greater than or equal to existing conditions;
- Mitigation/compensation provided offsite to potentially result in net-neutral or improved regional habitat conditions for potentially affected species populations;
- Adherence to applicable timing restrictions;
- Potential incorporation of NJDEP-reviewed and approved wildlife enhancement design features on mitigation sites and restoration areas;
- Regular (daily) clearing of work areas by agency-approved and qualified environmental monitors. Safe and appropriate wildlife relocation as needed;
- Regular inspection of protective measures such as fences by environmental monitors;
- Post-construction maintenance standards following NJDEP Integrated Vegetation Management guidance set forth in the Strategies to Minimize Adverse Impacts to Wildlife from Management Activities on Powerline Rights-of-Way in NJ (NJDEP ENSP 2011) (Strategies);
- Incorporate FERC Invasive Species Management Plan;
- Development and utilization of equipment cleaning/sterilization, and other protocols to avoid the spread of invasive species in sensitive terrestrial, wetland and aquatic habitats;
- Project-specific (SESC) standards including temporary erosion control measures such as silt fence, turbidity barriers, sediment filter bags, and erosion mats;
- Commitment not to use herbicides during post-construction maintenance activities;
- Specific seasonal restrictions and buffers will be followed for species and species groups in accordance with *Strategies*;
- Project-specific protocols on appropriate fueling station locations and prohibited areas such as streams and wetlands and transition areas; project-specific cleanup protocols and notification for any unintended spills during construction;
- Vegetation within temporary workspace areas including wetlands and transition areas will be cut flush to the ground and matted where practicable: no grubbing is proposed in these areas:
- Regular inspection of construction equipment to ensure proper functioning with appropriate filters and air quality controls;
- Adherence to agency-approved blasting plan;
- Avoidance of work personnel outside of the workspace in adjacent naturalized areas (sensitive habitat areas will be posted); and
- Post-construction restoration of stream banks and beds and downstream water quality monitoring as required (sensitive habitat areas) before, during and after construction.

5.162 Regulated Crossing 140

Avoidance measures eliminated Regulated Crossing 140.

5.163 Regulated Crossing 141

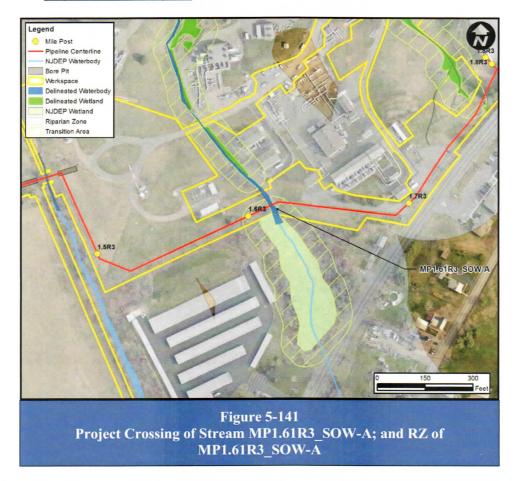

INVENTORY

Wetlands

Not present.

Transition Areas

The Transition Area associated with offsite wetlands is believed to be 50 feet due to the lack of exceptional characteristics associated with the wetland feature.

Special Aquatic Sites

Based upon fieldwork and review of publicly available data, special aquatic sites as defined at N.J.A.C. 7:7A-1.4 are not located at this regulated crossing.

Public Lands

None of the regulated resources in this crossing are on public lands.

Critical Habitat and Threatened or Endangered Species and their Habitat

Species accounts describing the natural history and habitat requirements; habitat assessment and/or targeted species survey results; study corridor documentation; potential habitat impacts; and

recommended measures to avoid, minimize, and mitigate potential impacts to New Jersey Statelisted species potentially occurring within regulated areas of the study corridor are provided in the HPP.

State Open Waters and Channels

Stream MP1.61R3_SOW-A is a field-delineated intermittent stream approximately 12 feet wide with a substrate consisting mostly of rip-rap. This stream enters the Lambertville Station at the southern property boundary and continues north. The stream passes through two culverts within the Station property. This stream is the subject of NJDEP Flood Hazard Verification Approval (File No. 1026-02-0003.2 FHA 180001).

Riparian Zones

RZ of Stream MP1.61R3_SOW-A is the 300-foot riparian area associated with this stream. This riparian area is mostly actively disturbed.

Fishery Resources

According to the Surface Water Quality Standards N.J.A.C.7:9, Alexauken Creek is classified as a freshwater trout maintenance waterbody (FW2-TM(C1)).

ASSESSMENT

Analysis Potential Temporary and Permanent Adverse Environmental Impacts of the Proposed Regulated Activity

Dry crossing of streams is the pipeline construction method proposed at this regulated crossing. This crossing method is proposed at locations where the use of trenchless technology is not feasible. The Alternatives Analysis, Attachment K, documents this finding. Unavoidable temporary impacts include disturbance to vegetation for temporary construction access and workspace for the Project. Temporary disturbance of wetlands and stream channels during construction is necessary for pipeline installation. Permanent impacts include the removal of trees and shrubs located within 15 feet of the pipeline that could compromise the integrity of the pipeline in compliance with FERC requirements. In-place restoration is proposed to minimize environmental impacts at this crossing; mitigation, as required by NJDEP rules, is proposed to compensate for adverse wetland and riparian zone impacts. As a result of these considerations, proposed construction at this crossing is not anticipated to result in significant permanent adverse environmental impacts.

Measures Taken to Reduce Potential Adverse Environmental Impacts


Where impacts could not be avoided with trenchless technology construction, PennEast sought to minimize the impacts to wetlands, State Open Waters and riparian zones with workspace modifications. A discussion of workspace modification efforts is provided in the Alternatives Analysis (Attachment K). PennEast will implement Project specific BMPs as detailed on the Project Soil Erosion and Sedimentation Control Plans (Attachment E-4) to further minimize or avoid adverse environmental impacts. Section 4 of this report details the range of proposed BMPs and mitigation measures taken to reduce potential adverse environmental impacts. These BMPs comply with the Standards for Soil Erosion and Sediment Control in New Jersey.

The following key measures will be implemented to avoid, minimize and mitigate potential adverse environmental impacts:

Delineation of all wetlands in the Project area;

- Avoidance, and minimization of impacts to wetlands to the greatest extent practicable as described in the Alternatives Analysis provided in Attachment K of the Multi-Permit Application;
- Mitigation of unavoidable impacts as described in the Mitigation Proposal provided Attachment N of the Multi-Permit Application;
- Minimization of the operational easement width in wetlands;
- Implementation of trenchless technology construction techniques;
- Follow the site-specific *Inadvertent Returns and Contingency Plan* to avoid and minimize potential impacts from inadvertent return;
- Collocation with existing ROW areas where possible and permitted to minimize forest losses:
- Minimization of forest and vegetation clearing to the greatest extent practicable;
- Allowed post-construction succession of temporarily cleared forest areas and restoration
 of forested wetlands to a function or value greater than or equal to existing conditions
 where practicable;
- Restoration of grassland areas to a function or value greater than or equal to existing conditions:
- Mitigation/compensation provided offsite to potentially result in net-neutral or improved regional habitat conditions for potentially affected species populations;
- Adherence to applicable timing restrictions;
- Potential incorporation of NJDEP-reviewed and approved wildlife enhancement design features on mitigation sites and restoration areas;
- Regular (daily) clearing of work areas by agency-approved and qualified environmental monitors. Safe and appropriate wildlife relocation as needed;
- Regular inspection of protective measures such as fences by environmental monitors;
- Post-construction maintenance standards following NJDEP Integrated Vegetation Management guidance set forth in the Strategies to Minimize Adverse Impacts to Wildlife from Management Activities on Powerline Rights-of-Way in NJ (NJDEP ENSP 2011) (Strategies);
- Incorporate FERC Invasive Species Management Plan;
- Development and utilization of equipment cleaning/sterilization, and other protocols to avoid the spread of invasive species in sensitive terrestrial, wetland and aquatic habitats;
- Project-specific (SESC) standards including temporary erosion control measures such as silt fence, turbidity barriers, sediment filter bags, and erosion mats;
- Commitment not to use herbicides during post-construction maintenance activities;
- Specific seasonal restrictions and buffers will be followed for species and species groups in accordance with *Strategies*;
- Project-specific protocols on appropriate fueling station locations and prohibited areas such
 as streams and wetlands and transition areas; project-specific cleanup protocols and
 notification for any unintended spills during construction;
- Vegetation within temporary workspace areas including wetlands and transition areas will be cut flush to the ground and matted where practicable: no grubbing is proposed in these areas;
- Regular inspection of construction equipment to ensure proper functioning with appropriate filters and air quality controls;
- Adherence to agency-approved blasting plan;
- Avoidance of work personnel outside of the workspace in adjacent naturalized areas (sensitive habitat areas will be posted); and
- Post-construction restoration of stream banks and beds and downstream water quality monitoring as required (sensitive habitat areas) before, during and after construction.

5.164 Regulated Crossing 142

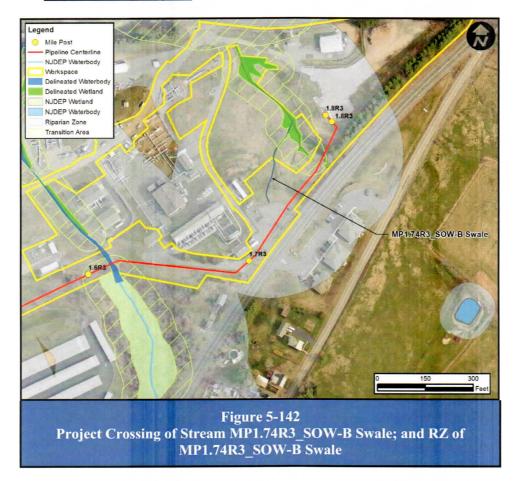

INVENTORY

Wetlands

Not present.

Transition Areas

Not present.

Special Aquatic Sites

Based upon fieldwork and review of publicly available data, special aquatic sites as defined at N.J.A.C. 7:7A-1.4 are not located at this regulated crossing.

Public Lands

None of the regulated resources in this crossing are on public lands.

Critical Habitat and Threatened or Endangered Species and their Habitat

MP1.74R3_SOW-B Swale has not been identified as potentially suitable habitat for any threatened or endangered species.

Species accounts describing the natural history and habitat requirements; habitat assessment and/or targeted species survey results; study corridor documentation; potential habitat impacts; and recommended measures to avoid, minimize, and mitigate potential impacts to New Jersey Statelisted species potentially occurring within regulated areas of the study corridor are provided in the HPP.

State Open Waters and Channels

Stream MP1.74R3_SOW-B Swale is a field-delineated swale feature draining to an off-site, unnamed tributary to Alexauken Creek. NJDEP determined that this feature is a non-jurisdictional, vegetated swale (NJDEP File No. 1026-02-00003.2 FHA 180001). Further, it was determined that the feature has no riparian area.

Riparian Zones

In accordance with N.J.A.C. 7:13-4.1(c), a swale does not have an associated riparian zone.

Fishery Resources

According to the Surface Water Quality Standards N.J.A.C.7:9, Alexauken Creek is classified as a freshwater trout maintenance waterbody (FW2-TM(C1)).

ASSESSMENT

Analysis Potential Temporary and Permanent Adverse Environmental Impacts of the Proposed Regulated Activity

Dry crossing of streams is the pipeline construction method proposed at this regulated crossing. This crossing method is proposed at locations where the use of trenchless technology is not feasible. The Alternatives Analysis, Attachment K, documents this finding. Unavoidable temporary impacts include disturbance to vegetation for temporary construction access and workspace for the Project. Temporary disturbance of wetlands and stream channels during construction is necessary for pipeline installation. Permanent impacts include the removal of trees and shrubs located within 15 feet of the pipeline that could compromise the integrity of the pipeline in compliance with FERC requirements. In-place restoration is proposed to minimize environmental impacts at this crossing; mitigation, as required by NJDEP rules, is proposed to compensate for adverse wetland and riparian zone impacts. As a result of these considerations, proposed construction at this crossing is not anticipated to result in significant permanent adverse environmental impacts.

Measures Taken to Reduce Potential Adverse Environmental Impacts

Where impacts could not be avoided with trenchless technology construction, PennEast sought to minimize the impacts to wetlands, State Open Waters and riparian zones with workspace modifications. A discussion of workspace modification efforts is provided in the Alternatives Analysis (Attachment K). PennEast will implement Project specific BMPs as detailed on the Project Soil Erosion and Sedimentation Control Plans (Attachment E-4) to further minimize or avoid adverse environmental impacts. Section 4 of this report details the range of proposed BMPs and mitigation measures taken to reduce potential adverse environmental impacts. These BMPs comply with the Standards for Soil Erosion and Sediment Control in New Jersey.


- Delineation of all wetlands in the Project area;
- Avoidance, and minimization of impacts to wetlands to the greatest extent practicable as described in the Alternatives Analysis provided in Attachment K of the Multi-Permit Application;
- Mitigation of unavoidable impacts as described in the Mitigation Proposal provided Attachment N of the Multi-Permit Application;
- Minimization of the operational easement width in wetlands;
- Implementation of trenchless technology construction techniques;
- Follow the site-specific *Inadvertent Returns and Contingency Plan* to avoid and minimize potential impacts from inadvertent return;
- Collocation with existing ROW areas where possible and permitted to minimize forest losses;
- Minimization of forest and vegetation clearing to the greatest extent practicable;
- Allowed post-construction succession of temporarily cleared forest areas and restoration
 of forested wetlands to a function or value greater than or equal to existing conditions
 where practicable;
- Restoration of grassland areas to a function or value greater than or equal to existing conditions;
- Mitigation/compensation provided offsite to potentially result in net-neutral or improved regional habitat conditions for potentially affected species populations;
- Adherence to applicable timing restrictions;
- Potential incorporation of NJDEP-reviewed and approved wildlife enhancement design features on mitigation sites and restoration areas;
- Regular (daily) clearing of work areas by agency-approved and qualified environmental monitors. Safe and appropriate wildlife relocation as needed;
- Regular inspection of protective measures such as fences by environmental monitors;
- Post-construction maintenance standards following NJDEP Integrated Vegetation Management guidance set forth in the Strategies to Minimize Adverse Impacts to Wildlife from Management Activities on Powerline Rights-of-Way in NJ (NJDEP ENSP 2011) (Strategies);
- Incorporate FERC Invasive Species Management Plan;
- Development and utilization of equipment cleaning/sterilization, and other protocols to avoid the spread of invasive species in sensitive terrestrial, wetland and aquatic habitats;
- Project-specific (SESC) standards including temporary erosion control measures such as silt fence, turbidity barriers, sediment filter bags, and erosion mats;
- Commitment not to use herbicides during post-construction maintenance activities;
- Specific seasonal restrictions and buffers will be followed for species and species groups in accordance with *Strategies*;
- Project-specific protocols on appropriate fueling station locations and prohibited areas such
 as streams and wetlands and transition areas; project-specific cleanup protocols and
 notification for any unintended spills during construction;
- Vegetation within temporary workspace areas including wetlands and transition areas will be cut flush to the ground and matted where practicable: no grubbing is proposed in these areas:
- Regular inspection of construction equipment to ensure proper functioning with appropriate filters and air quality controls;
- Adherence to agency-approved blasting plan;
- Avoidance of work personnel outside of the workspace in adjacent naturalized areas (sensitive habitat areas will be posted); and
- Post-construction restoration of stream banks and beds and downstream water quality monitoring as required (sensitive habitat areas) before, during and after construction.

- Delineation of all wetlands in the Project area;
- Avoidance, and minimization of impacts to wetlands to the greatest extent practicable as described in the Alternatives Analysis provided in Attachment K of the Multi-Permit Application;
- Mitigation of unavoidable impacts as described in the Mitigation Proposal provided Attachment N of the Multi-Permit Application;
- Minimization of the operational easement width in wetlands;
- Implementation of trenchless technology construction techniques;
- Follow the site-specific *Inadvertent Returns and Contingency Plan* to avoid and minimize potential impacts from inadvertent return;
- Collocation with existing ROW areas where possible and permitted to minimize forest losses;
- Minimization of forest and vegetation clearing to the greatest extent practicable;
- Allowed post-construction succession of temporarily cleared forest areas and restoration
 of forested wetlands to a function or value greater than or equal to existing conditions
 where practicable;
- Restoration of grassland areas to a function or value greater than or equal to existing conditions;
- Mitigation/compensation provided offsite to potentially result in net-neutral or improved regional habitat conditions for potentially affected species populations;
- Adherence to applicable timing restrictions;
- Potential incorporation of NJDEP-reviewed and approved wildlife enhancement design features on mitigation sites and restoration areas;
- Regular (daily) clearing of work areas by agency-approved and qualified environmental monitors. Safe and appropriate wildlife relocation as needed;
- Regular inspection of protective measures such as fences by environmental monitors;
- Post-construction maintenance standards following NJDEP Integrated Vegetation Management guidance set forth in the Strategies to Minimize Adverse Impacts to Wildlife from Management Activities on Powerline Rights-of-Way in NJ (NJDEP ENSP 2011) (Strategies);
- Incorporate FERC Invasive Species Management Plan;
- Development and utilization of equipment cleaning/sterilization, and other protocols to avoid the spread of invasive species in sensitive terrestrial, wetland and aquatic habitats;
- Project-specific (SESC) standards including temporary erosion control measures such as silt fence, turbidity barriers, sediment filter bags, and erosion mats;
- Commitment not to use herbicides during post-construction maintenance activities;
- Specific seasonal restrictions and buffers will be followed for species and species groups in accordance with *Strategies*;
- Project-specific protocols on appropriate fueling station locations and prohibited areas such as streams and wetlands and transition areas; project-specific cleanup protocols and notification for any unintended spills during construction;
- Vegetation within temporary workspace areas including wetlands and transition areas will be cut flush to the ground and matted where practicable: no grubbing is proposed in these areas;
- Regular inspection of construction equipment to ensure proper functioning with appropriate filters and air quality controls;
- Adherence to agency-approved blasting plan;
- Avoidance of work personnel outside of the workspace in adjacent naturalized areas (sensitive habitat areas will be posted); and
- Post-construction restoration of stream banks and beds and downstream water quality monitoring as required (sensitive habitat areas) before, during and after construction.

5.165 Regulated Crossing 143

Avoidance measures eliminated Regulated Crossing 143.

5.166 Regulated Crossing 144

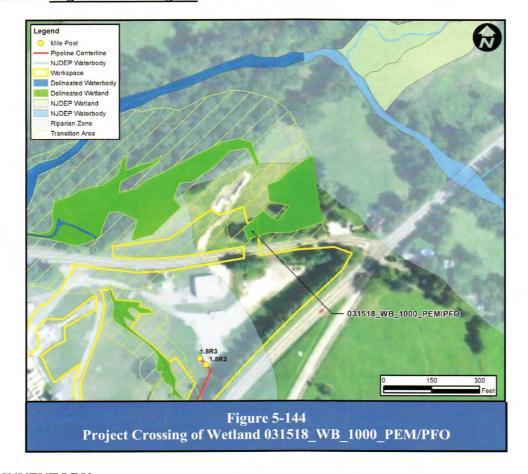

INVENTORY

Wetlands

Wetland 031518_WB_1000_PEM/PFO is a field-delineated palustrine emergent/forested wetland partially located within a natural gas utility right-of-way clearing and an adjacent wooded area. Additional information on this wetland can be found in the WDR provided in Attachment F of the Multi-Permit Application.

Transition Areas

The Transition Area is assumed to be 50 feet due to the lack of exceptional characteristics associated with the wetland feature.

Special Aquatic Sites

Based upon fieldwork and review of publicly available data, special aquatic sites as defined at N.J.A.C. 7:7A-1.4 are not located at this regulated crossing.

Public Lands

None of the regulated resources in this crossing are on public lands.

Critical Habitat and Threatened or Endangered Species and their Habitat

Wetland 031518_WB_1000_PEM/PFO has not been identified as potentially suitable habitat for any threatened or endangered species.

Species accounts describing the natural history and habitat requirements; habitat assessment and/or targeted species survey results; study corridor documentation; potential habitat impacts; and recommended measures to avoid, minimize, and mitigate potential impacts to New Jersey Statelisted species potentially occurring within regulated areas of the study corridor are provided in the HPP.

State Open Waters and Channels

Based upon fieldwork and review of publicly available data, stream channels are not located at this regulated crossing.

Riparian Zones

Based upon fieldwork and review of publicly available data, riparian zones are not located at this regulated crossing.

Fishery Resources

According to the Surface Water Quality Standards N.J.A.C.7:9, Alexauken Creek is classified as a freshwater trout maintenance waterbody (FW2-TM(C1)).

ASSESSMENT

Analysis Potential Temporary and Permanent Adverse Environmental Impacts of the Proposed Regulated Activity

Open-cut through wetland areas is the pipeline construction method proposed at this regulated crossing. This crossing method is proposed at locations where the use of trenchless technology is not feasible. The Alternatives Analysis, Attachment K, documents this finding. Unavoidable temporary impacts include disturbance to vegetation for temporary construction access and workspace for the Project. Temporary disturbance of wetlands and stream channels during construction is necessary for pipeline installation. Permanent impacts include the removal of trees and shrubs located within 15 feet of the pipeline that could compromise the integrity of the pipeline in compliance with FERC requirements. In-place restoration is proposed to minimize environmental impacts at this crossing; mitigation, as required by NJDEP rules, is proposed to compensate for adverse wetland and riparian zone impacts. As a result of these considerations, proposed construction at this crossing is not anticipated to result in significant permanent adverse environmental impacts.


Measures Taken to Reduce Potential Adverse Environmental Impacts

Where impacts could not be avoided with trenchless technology construction, PennEast sought to minimize the impacts to wetlands, State Open Waters and riparian zones with workspace modifications. A discussion of workspace modification efforts is provided in the Alternatives Analysis (Attachment K). PennEast will implement Project specific BMPs as detailed on the Project Soil Erosion and Sedimentation Control Plans (Attachment E-4) to further minimize or avoid adverse environmental impacts. Section 4 of this report details the range of proposed BMPs and mitigation measures taken to reduce potential adverse environmental impacts. These BMPs comply with the Standards for Soil Erosion and Sediment Control in New Jersey.

- Delineation of all wetlands in the Project area;
- Avoidance, and minimization of impacts to wetlands to the greatest extent practicable as described in the Alternatives Analysis provided in Attachment K of the Multi-Permit Application;
- Mitigation of unavoidable impacts as described in the Mitigation Proposal provided Attachment N of the Multi-Permit Application;
- Minimization of the operational easement width in wetlands;
- Implementation of trenchless technology construction techniques;
- Follow the site-specific *Inadvertent Returns and Contingency Plan* to avoid and minimize potential impacts from inadvertent return;
- Collocation with existing ROW areas where possible and permitted to minimize forest losses;
- Minimization of forest and vegetation clearing to the greatest extent practicable;
- Allowed post-construction succession of temporarily cleared forest areas and restoration
 of forested wetlands to a function or value greater than or equal to existing conditions
 where practicable;
- Restoration of grassland areas to a function or value greater than or equal to existing conditions;
- Mitigation/compensation provided offsite to potentially result in net-neutral or improved regional habitat conditions for potentially affected species populations;
- Adherence to applicable timing restrictions;
- Potential incorporation of NJDEP-reviewed and approved wildlife enhancement design features on mitigation sites and restoration areas;
- Regular (daily) clearing of work areas by agency-approved and qualified environmental monitors. Safe and appropriate wildlife relocation as needed;
- Regular inspection of protective measures such as fences by environmental monitors;
- Post-construction maintenance standards following NJDEP Integrated Vegetation Management guidance set forth in the Strategies to Minimize Adverse Impacts to Wildlife from Management Activities on Powerline Rights-of-Way in NJ (NJDEP ENSP 2011) (Strategies);
- Incorporate FERC Invasive Species Management Plan;
- Development and utilization of equipment cleaning/sterilization, and other protocols to avoid the spread of invasive species in sensitive terrestrial, wetland and aquatic habitats;
- Project-specific (SESC) standards including temporary erosion control measures such as silt fence, turbidity barriers, sediment filter bags, and erosion mats;
- Commitment not to use herbicides during post-construction maintenance activities;
- Specific seasonal restrictions and buffers will be followed for species and species groups in accordance with *Strategies*;
- Project-specific protocols on appropriate fueling station locations and prohibited areas such
 as streams and wetlands and transition areas; project-specific cleanup protocols and
 notification for any unintended spills during construction;
- Vegetation within temporary workspace areas including wetlands and transition areas will be cut flush to the ground and matted where practicable: no grubbing is proposed in these areas;
- Regular inspection of construction equipment to ensure proper functioning with appropriate filters and air quality controls;
- Adherence to agency-approved blasting plan;

- Avoidance of work personnel outside of the workspace in adjacent naturalized areas (sensitive habitat areas will be posted); and
- Post-construction restoration of stream banks and beds and downstream water quality monitoring as required (sensitive habitat areas) before, during and after construction.

5.167 Regulated Crossing 145

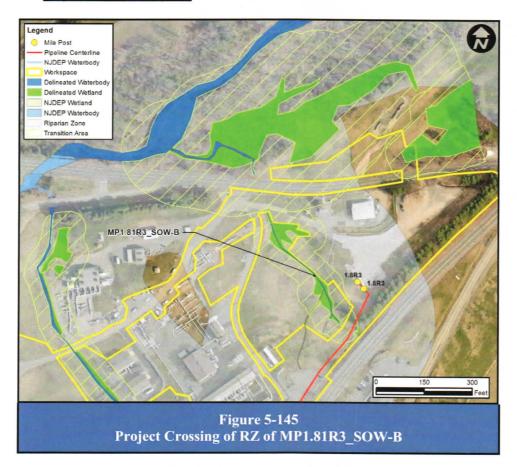

INVENTORY

Wetlands

Not present.

Transition Areas

Not present.

Special Aquatic Sites

Based upon fieldwork and review of publicly available data, special aquatic sites as defined at N.J.A.C. 7:7A-1.4 are not located at this regulated crossing.

Public Lands

None of the regulated resources in this crossing are on public lands.

Critical Habitat and Threatened or Endangered Species and their Habitat

MP1.81R3_SOW-B has not been identified as potentially suitable habitat for any threatened or endangered species.

Species accounts describing the natural history and habitat requirements; habitat assessment and/or targeted species survey results; study corridor documentation; potential habitat impacts; and recommended measures to avoid, minimize, and mitigate potential impacts to New Jersey Statelisted species potentially occurring within regulated areas of the study corridor are provided in the HPP.

State Open Waters and Channels

Based upon fieldwork and review of publicly available data, stream channels are not located at this regulated crossing.

Riparian Zones

RZ of MP1.81R3_SOW-B is the 300-foot riparian area associated with an off-site, unnamed tributary to Alexauken Creek. This riparian area is actively disturbed.

Fishery Resources

According to the Surface Water Quality Standards N.J.A.C.7:9, Alexauken Creek is classified as a freshwater trout maintenance waterbody (FW2-TM(C1)).

ASSESSMENT

Analysis Potential Temporary and Permanent Adverse Environmental Impacts of the Proposed Regulated Activity


Open-cut through wetland areas and dry crossing of streams is the pipeline construction method proposed at this regulated crossing. This crossing method is proposed at locations where the use of trenchless technology is not feasible. The Alternatives Analysis, Attachment K, documents this finding. Unavoidable temporary impacts include disturbance to vegetation for temporary construction access and workspace for the Project. Temporary disturbance of wetlands and stream channels during construction is necessary for pipeline installation. Permanent impacts include the removal of trees and shrubs located within 15 feet of the pipeline that could compromise the integrity of the pipeline in compliance with FERC requirements. In-place restoration is proposed to minimize environmental impacts at this crossing; mitigation, as required by NJDEP rules, is proposed to compensate for adverse wetland and riparian zone impacts. As a result of these considerations, proposed construction at this crossing is not anticipated to result in significant permanent adverse environmental impacts.

Measures Taken to Reduce Potential Adverse Environmental Impacts

Where impacts could not be avoided with trenchless technology construction, PennEast sought to minimize the impacts to wetlands, State Open Waters and riparian zones with workspace modifications. A discussion of workspace modification efforts is provided in the Alternatives Analysis (Attachment K). PennEast will implement Project specific BMPs as detailed on the Project Soil Erosion and Sedimentation Control Plans (Attachment E-4) to further minimize or avoid adverse environmental impacts. Section 4 of this report details the range of proposed BMPs and mitigation measures taken to reduce potential adverse environmental impacts. These BMPs comply with the Standards for Soil Erosion and Sediment Control in New Jersey.

- Delineation of all wetlands in the Project area;
- Avoidance, and minimization of impacts to wetlands to the greatest extent practicable as described in the Alternatives Analysis provided in Attachment K of the Multi-Permit Application;
- Mitigation of unavoidable impacts as described in the Mitigation Proposal provided Attachment N of the Multi-Permit Application;
- Minimization of the operational easement width in wetlands;
- Implementation of trenchless technology construction techniques;
- Follow the site-specific *Inadvertent Returns and Contingency Plan* to avoid and minimize potential impacts from inadvertent return;
- Collocation with existing ROW areas where possible and permitted to minimize forest losses;
- Minimization of forest and vegetation clearing to the greatest extent practicable;
- Allowed post-construction succession of temporarily cleared forest areas and restoration
 of forested wetlands to a function or value greater than or equal to existing conditions
 where practicable;
- Restoration of grassland areas to a function or value greater than or equal to existing conditions;
- Mitigation/compensation provided offsite to potentially result in net-neutral or improved regional habitat conditions for potentially affected species populations;
- Adherence to applicable timing restrictions;
- Potential incorporation of NJDEP-reviewed and approved wildlife enhancement design features on mitigation sites and restoration areas;
- Regular (daily) clearing of work areas by agency-approved and qualified environmental monitors. Safe and appropriate wildlife relocation as needed;
- Regular inspection of protective measures such as fences by environmental monitors;
- Post-construction maintenance standards following NJDEP Integrated Vegetation Management guidance set forth in the *Strategies to Minimize Adverse Impacts to Wildlife from Management Activities on Powerline Rights-of-Way in NJ* (NJDEP ENSP 2011) (Strategies);
- Incorporate FERC Invasive Species Management Plan;
- Development and utilization of equipment cleaning/sterilization, and other protocols to avoid the spread of invasive species in sensitive terrestrial, wetland and aquatic habitats;
- Project-specific (SESC) standards including temporary erosion control measures such as silt fence, turbidity barriers, sediment filter bags, and erosion mats;
- Commitment not to use herbicides during post-construction maintenance activities;
- Specific seasonal restrictions and buffers will be followed for species and species groups in accordance with *Strategies*;
- Project-specific protocols on appropriate fueling station locations and prohibited areas such
 as streams and wetlands and transition areas; project-specific cleanup protocols and
 notification for any unintended spills during construction;
- Vegetation within temporary workspace areas including wetlands and transition areas will be cut flush to the ground and matted where practicable: no grubbing is proposed in these areas;
- Regular inspection of construction equipment to ensure proper functioning with appropriate filters and air quality controls;
- Adherence to agency-approved blasting plan;
- Avoidance of work personnel outside of the workspace in adjacent naturalized areas (sensitive habitat areas will be posted); and
- Post-construction restoration of stream banks and beds and downstream water quality monitoring as required (sensitive habitat areas) before, during and after construction.

5.168 Regulated Crossing 146

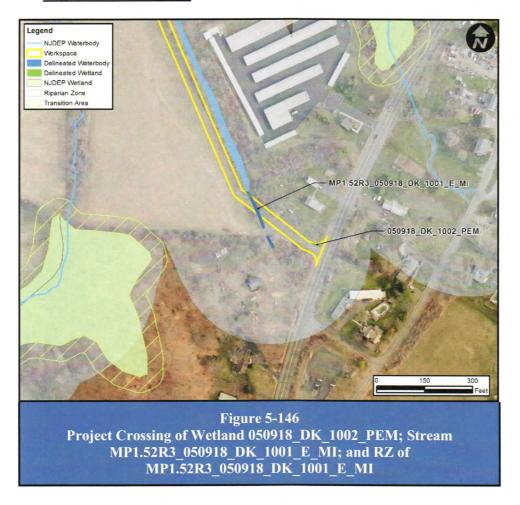

INVENTORY

Wetlands

Wetland 050918_DK_1002_PEM is a field-delineated palustrine emergent wetland located along a paved access road. Additional information on this wetland can be found in the WDR provided in Attachment F of the Multi-Permit Application.

Transition Areas

Not present.

Special Aquatic Sites

Based upon fieldwork and review of publicly available data, special aquatic sites as defined at N.J.A.C. 7:7A-1.4 are not located at this regulated crossing.

Public Lands

Regulated Resources 050918_DK_1002_PEM and 050918_DK_1001_E_MI are located on Block 5, Lot 9 in West Amwell Township. This property is public land owned by the State of New Jersey Department of Transportation.

Critical Habitat and Threatened or Endangered Species and their Habitat

Wetland 050918_DK_1002_PEM has not been identified as potentially suitable habitat for any threatened or endangered species.

Stream MP1.52R3_050918_DK_1001_E_ has not been identified as potentially suitable habitat for any threatened or endangered species.

Species accounts describing the natural history and habitat requirements; habitat assessment and/or targeted species survey results; study corridor documentation; potential habitat impacts; and recommended measures to avoid, minimize, and mitigate potential impacts to New Jersey Statelisted species potentially occurring within regulated areas of the study corridor are provided in the HPP.

State Open Waters and Channels

Stream MP1.52R3_050918_DK_1001_E_MIis an ephemeral minor water that drains north to an unnamed tributary to Alexauken Creek, field delineated as 030817_HS_1005_E_MI and 030817_HS_1004_E_MI.

Riparian Zones

RZ of MP1.52R3_050918_DK_1001_E_MI is the 300-foot riparian area associated with an unnamed tributary to Alexauken Creek.

Fishery Resources

According to the Surface Water Quality Standards N.J.A.C.7:9, Alexauken Creek is classified as a freshwater trout maintenance waterbody (FW2-TM(C1)).

ASSESSMENT

Analysis Potential Temporary and Permanent Adverse Environmental Impacts of the Proposed Regulated Activity

Access roads, HDD pullbacks, and other Project related surface disturbances not directly associated with pipeline installation are proposed at this regulated crossing. Regulated activities associated with these activities have been minimized to the maximum extent practicable as documented in the Alternatives Analysis, Attachment K. Proposed activities include temporary clearing and grading necessary for temporary construction access or workspace. Permanent impacts may include the removal of trees. In-place restoration is proposed to minimize environmental impacts at this crossing; mitigation, as required by NJDEP rules, is proposed to compensate for adverse wetland and riparian zone impacts. As a result of these considerations, proposed construction at this crossing is not anticipated to result in significant permanent adverse environmental impacts.

Measures Taken to Reduce Potential Adverse Environmental Impacts


Surface disturbances not directly associated with pipeline installation could not be avoided at this regulated crossing. PennEast sought to avoid or minimize the impacts to wetlands, State Open Waters and riparian zones in these areas; discussion of these efforts is provided in the Alternatives Analysis (Attachment K). PennEast will implement Project specific BMPs as detailed on the Project Soil Erosion and Sedimentation Control Plans (Attachment E-4) to further minimize or avoid adverse environmental impacts. Section 4 of this report details the range of proposed BMPs

and mitigation measures taken to reduce potential adverse environmental impacts. These BMPs comply with the Standards for Soil Erosion and Sediment Control in New Jersey.

- Delineation of all wetlands in the Project area;
- Avoidance, and minimization of impacts to wetlands to the greatest extent practicable as described in the Alternatives Analysis provided in Attachment K of the Multi-Permit Application;
- Mitigation of unavoidable impacts as described in the Mitigation Proposal provided Attachment N of the Multi-Permit Application;
- Minimization of the operational easement width in wetlands;
- Implementation of trenchless technology construction techniques;
- Follow the site-specific *Inadvertent Returns and Contingency Plan* to avoid and minimize potential impacts from inadvertent return;
- Collocation with existing ROW areas where possible and permitted to minimize forest losses;
- Minimization of forest and vegetation clearing to the greatest extent practicable;
- Allowed post-construction succession of temporarily cleared forest areas and restoration
 of forested wetlands to a function or value greater than or equal to existing conditions
 where practicable;
- Restoration of grassland areas to a function or value greater than or equal to existing conditions;
- Mitigation/compensation provided offsite to potentially result in net-neutral or improved regional habitat conditions for potentially affected species populations;
- Adherence to applicable timing restrictions;
- Potential incorporation of NJDEP-reviewed and approved wildlife enhancement design features on mitigation sites and restoration areas;
- Regular (daily) clearing of work areas by agency-approved and qualified environmental monitors. Safe and appropriate wildlife relocation as needed;
- Regular inspection of protective measures such as fences by environmental monitors;
- Post-construction maintenance standards following NJDEP Integrated Vegetation Management guidance set forth in the *Strategies to Minimize Adverse Impacts to Wildlife from Management Activities on Powerline Rights-of-Way in NJ* (NJDEP ENSP 2011) (Strategies);
- Incorporate FERC Invasive Species Management Plan;
- Development and utilization of equipment cleaning/sterilization, and other protocols to avoid the spread of invasive species in sensitive terrestrial, wetland and aquatic habitats;
- Project-specific (SESC) standards including temporary erosion control measures such as silt fence, turbidity barriers, sediment filter bags, and erosion mats;
- Commitment not to use herbicides during post-construction maintenance activities;
- Specific seasonal restrictions and buffers will be followed for species and species groups in accordance with *Strategies*;
- Project-specific protocols on appropriate fueling station locations and prohibited areas such
 as streams and wetlands and transition areas; project-specific cleanup protocols and
 notification for any unintended spills during construction;
- Vegetation within temporary workspace areas including wetlands and transition areas will be cut flush to the ground and matted where practicable: no grubbing is proposed in these areas;
- Regular inspection of construction equipment to ensure proper functioning with appropriate filters and air quality controls;

- Adherence to agency-approved blasting plan;
- Avoidance of work personnel outside of the workspace in adjacent naturalized areas (sensitive habitat areas will be posted); and
- Post-construction restoration of stream banks and beds and downstream water quality monitoring as required (sensitive habitat areas) before, during and after construction.

5.169 Regulated Crossing 147

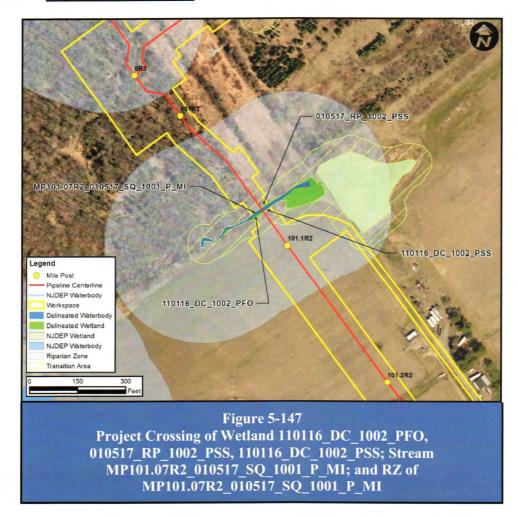

INVENTORY

Wetlands

Wetland 110116_DC_1002_PSS / 010517_RP_1002_PSS / 110116_DC_1002_PFO is a field-delineated palustrine scrub-shrub/forested wetland complex occurring along an unnamed minor perennial tributary of the Alexauken Creek. Additional information on this wetland can be found in the WDR provided in Attachment F of the Multi-Permit Application.

Transition Areas

The Transition Area is assumed to be 50 feet due to the lack of exceptional characteristics associated with the wetland feature.

Special Aquatic Sites

Based upon fieldwork and review of publicly available data, special aquatic sites as defined at N.J.A.C. 7:7A-1.4 are not located at this regulated crossing.

Public Lands

None of the regulated resources in this crossing are on public lands.